CODE: **AWO105PU** v.1.5
NAME: **7/40/DSPR/PUSTA**

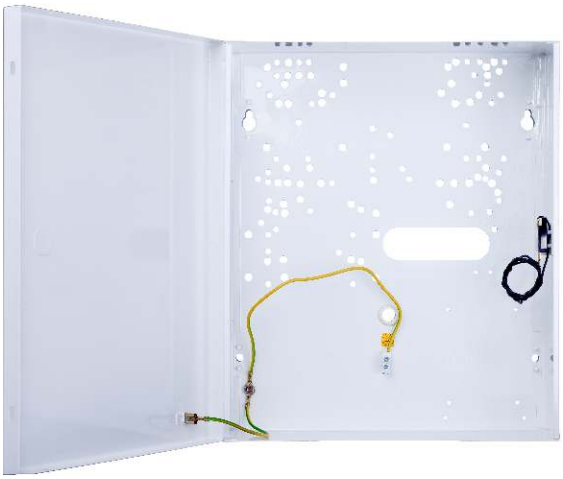

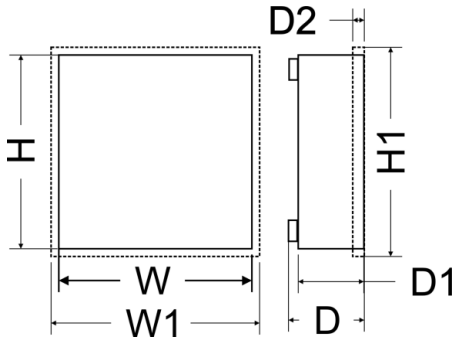

DESTINATION

DSC
CONTROL PANELS: PC585, PC608, PC1565-2P, PC5010 + PC 5108, PC5020 + Pc5108
MODULES: PC 5108, PC5108D, PC5208,PC4108, PC4116, PC4204, PC4400, PC4101,PC4216, PC4580, PC5400, PC5204, Pc5580

PARADOX
CONTROL PANELS: ESPRIT: 728, 728Ex, 738, 738Ex, 748, 748Ex,
SPECTRA: (1727, 1728Ex, 1738Ex) + ZX4, 748, 748Ex, 1748Es, **SP5500, Sp6000**

ROKONET
CONTROL PANELS: (RP205, RP206, RP214) + UOR ORBIT, CERBER

SATEL
CONTROL PANELS: CA4-V1, CA-5, CA-6, CA-10+ CA-10E (MST-1), INTEGRA 24, 32 + CA-64 (E, SM, O-OC)
MODULES: CA-64 (PP, EPS, ADR, O-R, O- ROC, OPS-OC, OPS-R, OPS-ROC, VMG-16, SR, DR, PTSA) + CA-64 (E, O-OC)

SUMMIT CONTROL PANELS: PENTA

CROW CONTROL PANELS: POWER WAVE 4, POWER WAVE 8

PYRONIX CONTROL PANELS: MATRIX 424, MATRIX 6

NAPCO CONTROL PANELS: XP-400, XP-600, XP-800

TELKOM-TELMOR CONTROL PANELS: **TCA-824 +** EXP/DIALER

TECHNICAL DATA

Dimensions:	W=250, H=290, D=88, W1=255, H1=295, D1=80mm, D2=14 [mm, +/-2]
Weight net/gross:	1,55 / 1,70 [kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
AC/AC power supplies:	without transformer - can be mounted in the casing: TRP20,TRP40,TRZ20,TRZ40
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting sourface) - 8mm, easy door removal, RAL 9003
Certification, declaration:	RoHS