


CODE: AWO200 v.1.9/IV
NAME: 17/TRP40/DSPR/L

EN

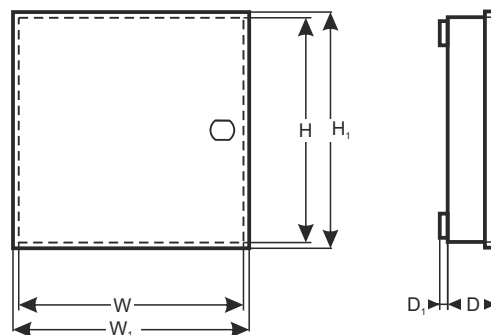

DESTINATION

DSC: (PC 1404, 1616, 1832, 1864, 4020, HS2016, HS2032, HS2064, HS2128) + 3x 5108 (4108, 5208, 5100, 4116, HSM2108, HSM2208)

MODULES: (4204, 4216, 4580, 5400, 5204, 5580, 5200, GSM/GPRS 3G2060, GSM/GPRS TL260GS, GSM/HSPA 3G2080E, GSM/HSPA TL2803GE) + 5x (4108, 5108, 5208, 5100, 4116, HSM2108, HSM2208)

PARADOX: (E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 (Z X 4, APR3-ADM2, APR3-HUB2, PGM4)

RISCO: PRO24, 116, 128, 140+ RP296EPS+ EZ16 (EZ04, Ez08)

SATEL: CA4V1, CA5, Ca6
 (VERSA5, 10, 15, CA10) + 2 x CA10E (CA64E, SM, MST1)
 (INTEGRA24, 32) + 2 x CA64E (SM)

MODUŁY: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM-16, SR, PTSA) + 2 x CA64E (SM)

PYRONIX: MATRIX 424, 6, 816, 832, 832+

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: TCA-824 + TEX800+ TMT1

ROGER: PR402, CPR 32-SE

EBS: PX 202A

PULSAR: MS1012, MSR1012, MSRK1012
 MS2012, MSR2012, MSRK2012

TECHNICAL DATA

External dimensions of the enclosure:	W=320, H=400, D+D1=90+8 [+/-2 mm]
External dimensions of the front panel:	W1=325, H1=405 [+/-2 mm]
Battery space:	17Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	3,550 / 3,825 [kg]
Transformer:	TRP 40 VA/16 V/18 V n the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating environment:	class II, -10°C+40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
Closing:	sheet-metal screws x 4
Notes:	optional: lockable (MR008 or MR027), distance from wall (mounting surface) - 8mm
Declaration, warranty:	CE, 2 years from the production date