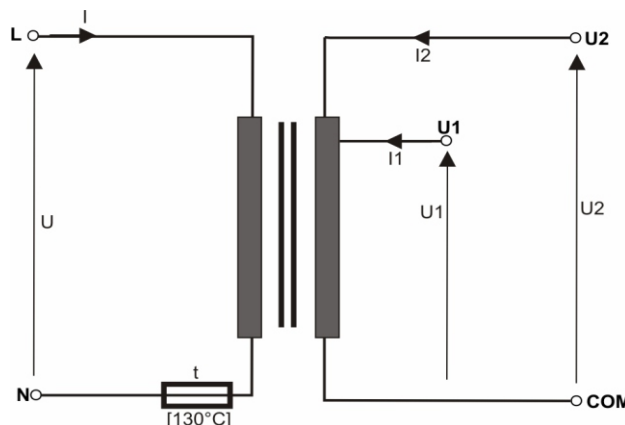


CODE: **AWT 027** v 1.0/III
 NAME: **Transformer 10VA/11,5V/14V**

Tab.1

Technical parameters of transformers: AWT 027						
COD NAME	S	U	I	U1 or U2	I1 or I2	t
AWT027 10VA/11,5 V/14 V	10VA	230 V	0,06 A	11,5 V or 14 V	0,8 A or 0,6 A	130°C

DESTINATION

The transformers are destined for supplying devices requiring AC voltage U1 or U2. (intercom, electric strike)

DANE TECHNICZNE

Casing:	IP64
Dimensions:	fig.1
Weight net/gross:	0,58kg / 0,63kg [+/-0,1kg]
Installation:	- cheese screw
Supply voltage:	230 V (-15%+ 10%), 50Hz
Current consumption I:	tab.1.
Output voltage U1/U2:	tab.1.
Rated power S:	tab.1.
Rated output current I1/I2:	tab.1.
Over-load protection t:	resettable fuse 130°C
Operating conditions:	2nd environmental, -10°C+ 40°C, Ta 40B
Certificates, declarations:	CE, RoHS, 2 year from the production date
Cable length:	AC 230 V- 160cm, AC 11,5 V AC 14 V- 100cm
Remarks:	

Dimensions:

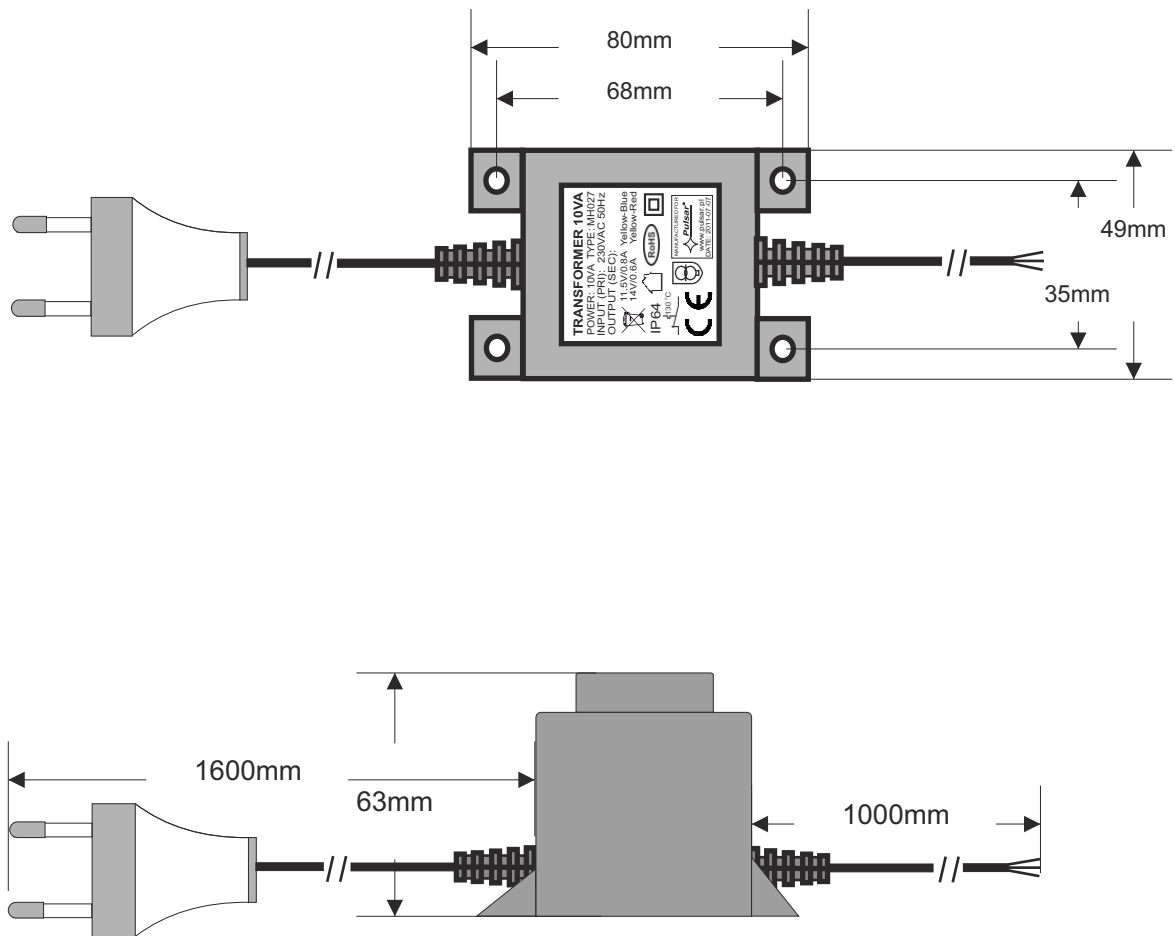


fig.1