


CODE: **AWO802C** v.1.2/VII
 NAME: **TOM-2C Residential telecommunication enclosures**

EN**



Flush mounted type

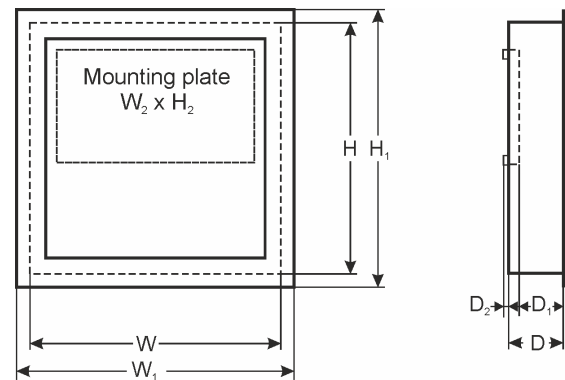

APPLICATION

The residential telecommunication enclosures need to be installed in public buildings and collective residential buildings.

The residential telecommunication enclosures should provide the possibility of a simple (without the need to replace the entire cable infrastructure) connection of telecommunications companies to the telecommunication installation of the building on the principle of equal access.



PRODUCT DESCRIPTION

The residential telecommunication enclosures allow the integration of the elements of computer network, telephone network, television network (RTVSAT), fiber-optic network and other telecommunication installations. This can be done with easily removable adapter with a space for the "keystone"-type sockets (mounting of the RJ45 and „F” connectors), additional holes for the „F” connectors and the SC/APC fiber optic connectors (both single and double).

Additional elements, such as RTVSAT splitters, can be mounted on the upper part of on the back panel. Mounting of these elements is also very easy and quick, as the attached PVC plate allows the installation by means of screws, without having to drill holes.

MAIN FEATURES

1. Flush mounted type
2. Removable, adjustable flange:
 - flange protection during renovation and construction work;
 - easy and aesthetic installation even in case of uneven mounting surface;
 - depth adjustment of the housing.
3. Removable door (convenient installation of wiring and other equipment)
4. Left or right door installation
5. Plastic mounting plate (easy and quick installation of additional equipment)
6. The set includes adapter for mounting the RJ45 Keystone socket, F connectors and SC/APC fiber optic connectors
7. A large number of holes for cable entry and mounting the box
8. Closed housing „CLICK” - type closing
9. Grounding of the housing.

TECHNICAL PARAMETERS

External dimensions of the enclosure:	W=295, H=345, D+D ₂ =90+5 [+/-2mm]
External dimensions of the flange:	W ₁ =330, H ₁ =380 [+/-2mm]
PVC mounting plate dimensions:	W ₂ =245, H ₂ =205 [+/-2mm]
Working depth:	D ₁ =80 [+/-2mm]
Possibility of mounting:	<ul style="list-style-type: none"> - keystone connectors (eg. RJ45, BNC) – 4 pcs. - dual „F” sockets (F-F connector) – 6 pcs. - simplex fiber optic adapter - SC – 2 pcs. - duplex fiber optic adapter - APC – 1 pcs. - 45x45mm hardware standard - 1 pcs.
Net/gross weight:	3,50kg / 3,90kg [+/-0,1kg]
Materials:	electrolytic galvanized sheet DC01, 3µm zinc coating corrosion protection: polyester paint, industrial use, color RAL9003 (white)
Destination:	indoor
Closing:	„CLICK”- type closing
Warranty:	3 year from the production date