



PU-NC200




PU-NC201



PU-NC211



PU-NC301




PU-NC206

Code	Parameters
PU-NC200	Twisted pair wire, U/UTP, PVC, cat 5e, 25AWG, Cu, Eca, (inside), 305m
PU-NC201	Twisted pair wire, U/UTP, PVC, cat 5e, 24AWG, Cu, Eca, (inside), 305m
PU-NC206	Twisted pair wire, U/UTP, PVC, cat 6, 23AWG, Cu, Eca, (inside), 305m
PU-NC301	Twisted pair wire, U/UTP, PE, cat 5e, 24AWG, Cu, Fca, (outside), 305m
PU-NC211	Shielded twisted pair wire, F/UTP, PVC, cat 5e, 24AWG, Cu, Eca, (inside), 305m

Application covers many different systems, starting from ICT systems, through IP video monitoring (especially recommended for IP PoE systems), to digital HD surveillance television (CVI, TVI, AHD) and access control.

Cable made of copper (99.99%), easily unwound in 305m cardboard packages. It has marker every 1m (from 305m to 1m) that facilitates measuring cable and quick determination of amount remaining in package. Special cable winding system allows for easy removal of cable from packaging (without having to open it).

U/UTP

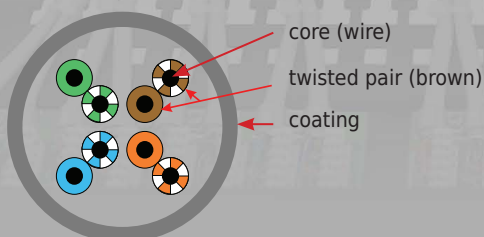

F/UTP

