


**Features:**

- Switch 6 ports
- 4 PoE ports 10/100/1000Mb/s (data transfer and power supply)
- 2 ports 10/100/1000Mb/s (UpLink)
- 30 W for each PoE port, supports devices compliant with the IEEE802.3af/at (**PoE+**) standard
- Supports auto-learning and auto-aging of MAC addresses (1K size)
- LED indication
- Pole mounting option (requires the OZB2 adapter - **optional accessory**)
- Built-in switch mode power supply PSCL520115 52 V DC/1,15 A/60 W
- Protections:
  - SCP short circuit protection
  - OLP overload protection
  - surge protection (AC input)
- IP56 hermetic enclosure
- warranty – 1 year from the production date

**Example of use.**

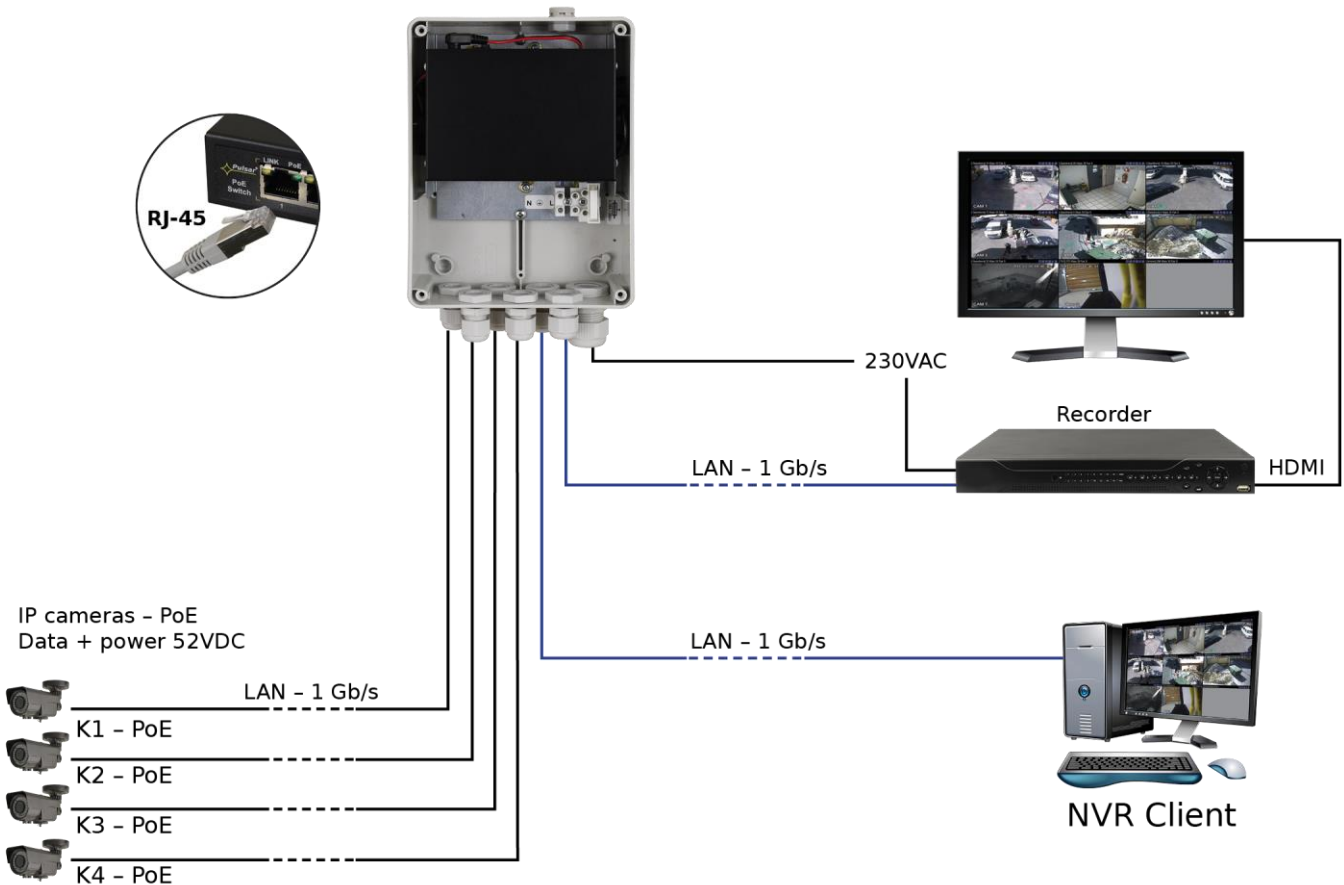

**1. Technical description**

**1.1. General description.**

SG64H is a 6-ports PoE switch designed to supply IP cameras operating in IEEE 802.3af/at standard. Automatic detection of any devices powered in the PoE/PoE+ standard is enabled at the 1 – 4 ports of the switch. The UpLink ports is used for connection of another network device via RJ45 connector. The LEDs at the front panel indicate the operation status (description in the table below).

The PoE technology ensures a network connection and reduces installation costs by eliminating the need to supply a separate power cable for each device. This method allows supplying other network devices, such as IP phone, wireless access point or router.

## 1.2 Block diagram.

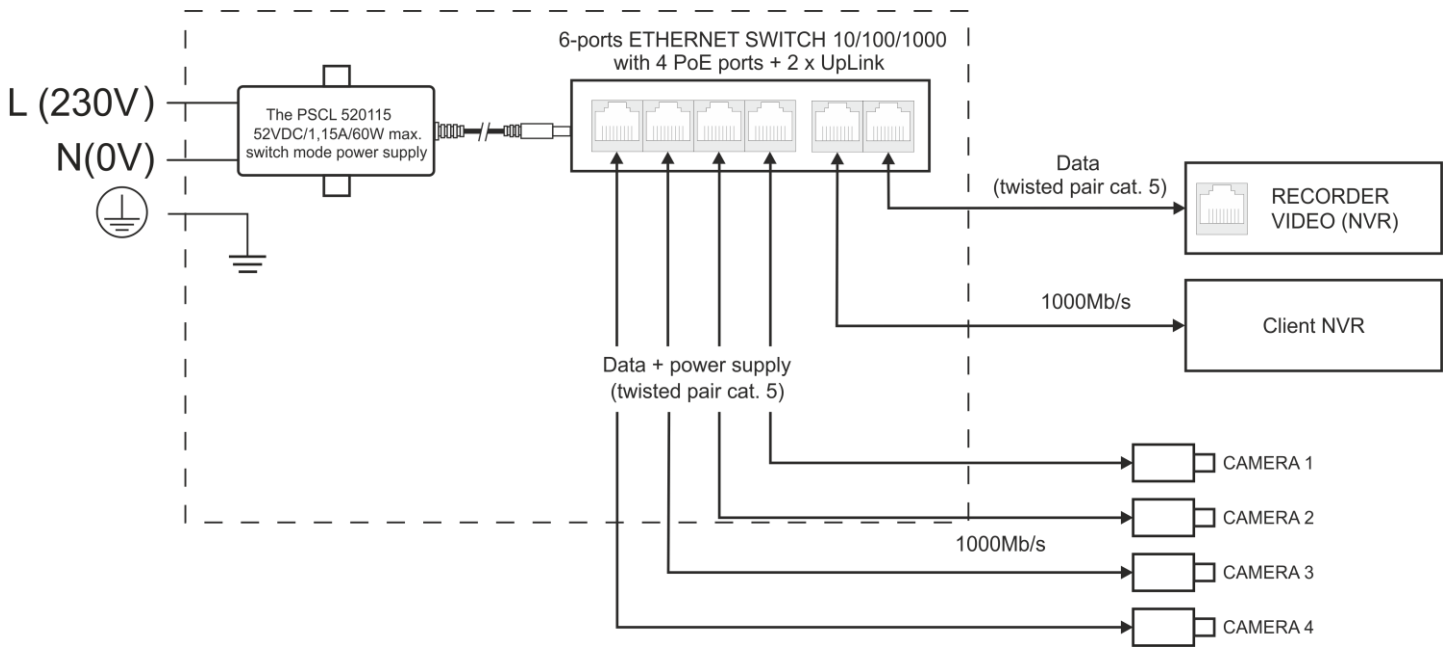


Fig. 1. Block diagram.

## 1.3. Description of components and connectors.

Table 1. (see Fig.2)

Element no. (Fig. 2)	Description
[1]	Pressure Compensator
[2]	PoE switch
[3]	Power supply connector of the PSU – L, N Protective connector
[4]	F <sub>MAINS</sub> fuse in the supply circuit (~230 V)
[5]	Cable glands

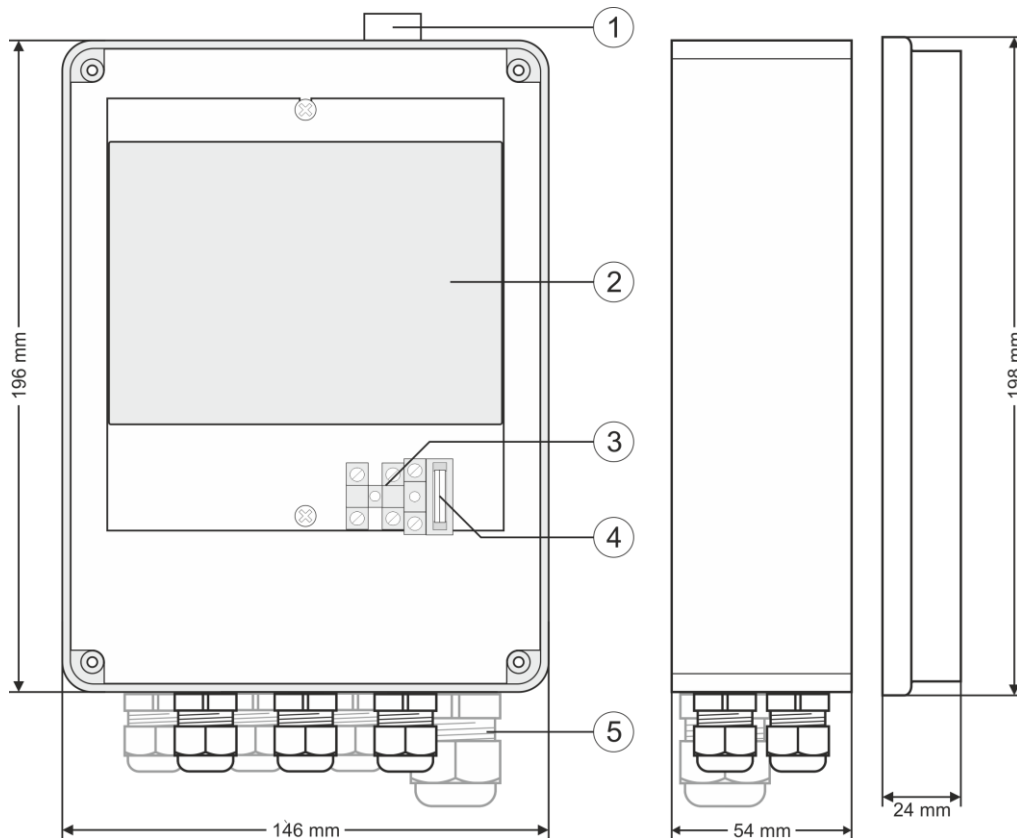


Fig. 2. The enclosure view.

Table 2. (see Fig. 3)

Element no. (Fig. 2)	Description
[1]	2 x UpLink ports
[2]	4 x PoE ports (1÷4)
[3]	DC power supply socket

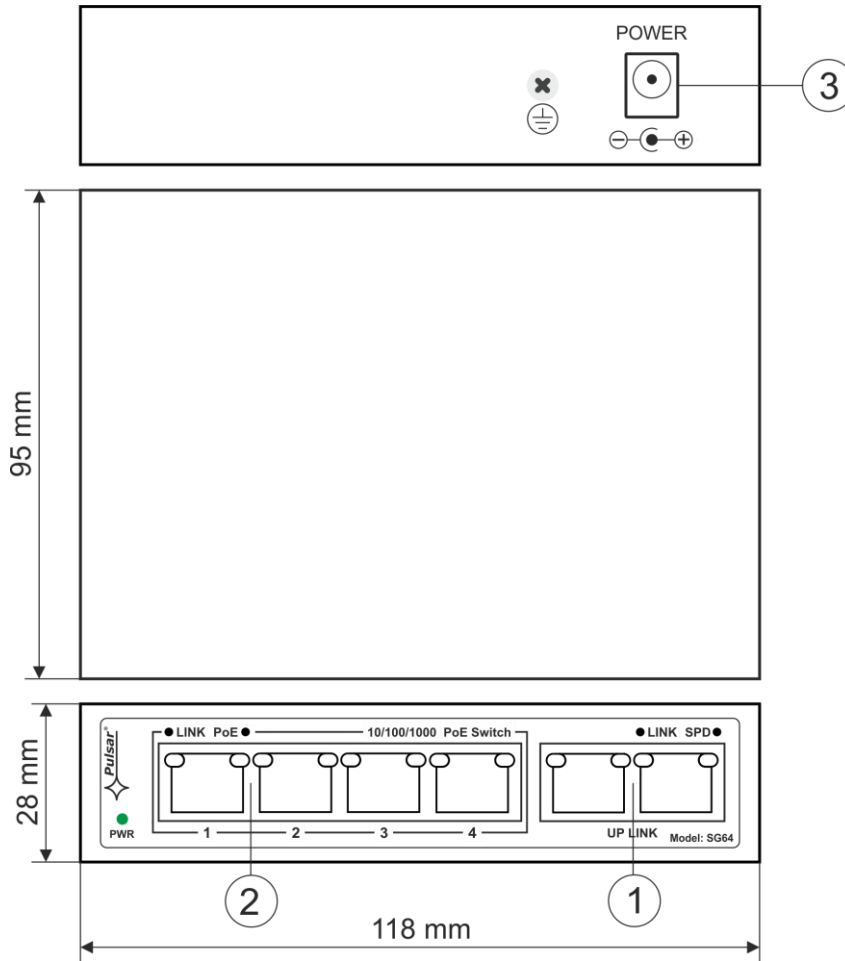


Fig. 3. The view switch'a.

1.4. Technical parameters.

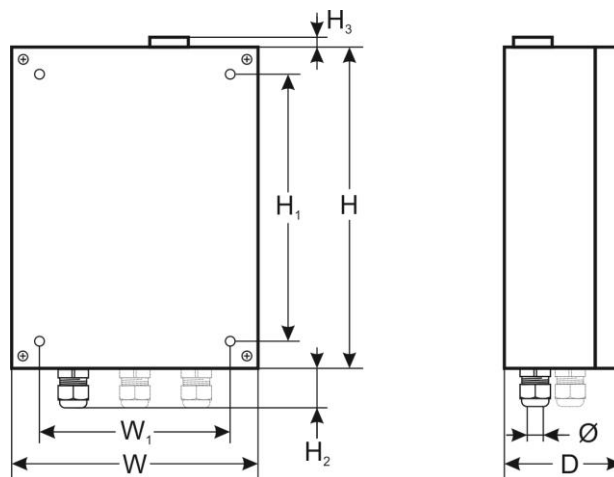


Table 3.

Ports	6 10/100/1000Mb/s ports (4 x PoE + 2 x UpLink) with connection speed auto-negotiation and MDI/MDIX Auto Cross
PoE power supply	IEEE 802.3af/at (1÷4 ports), 52 V DC / 30 W at each port *
Protocols, Standards	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
Bandwidth	8,8Gbps

<b>Transmission method</b>	Store-and-Forward
<b>Optical indication of operation</b>	Switch power supply; Link/Act; PoE Status
<b>Short circuit protection SCP</b>	electronic, automatic recovery
<b>Overload protection OLP</b>	150 %-200 % PSU power, automatic recovery
<b>Power supply</b>	~100-240 V; 50/60 Hz; 0,6 A switched mode power supply PSCL520115 52 V DC / 1,15 A/60 W max.
<b>F<sub>MAINS</sub> fuse</b>	T3,15 A / 250 V
<b>Operating conditions</b>	temperature -25°C ÷ 50°C, relative humidity 5 % - 90 %, no condensation
<b>External dimensions</b>	W=146, H=196, D=78 [+/- 2mm]
<b>Mounting dimensions</b>	W <sub>1</sub> =105, H <sub>1</sub> =155 [+/- 2mm]
<b>Height glands</b>	H <sub>2</sub> =35mm
<b>Height of the pressure compressor</b>	H <sub>3</sub> =9 [mm]
<b>The number of cable glands/ Ø cables</b>	6 pcs. / 4÷8mm + 1 pcs. / 10÷14mm
<b>Enclosure</b>	IP56, light grey
<b>Additional equipment</b>	plate to be fixed surface
<b>Net/gross weight</b>	1,3 / 1,4 kg
<b>Protection class EN 60950-1:2007</b>	I (first)
<b>Storage temperatur</b>	-25 °C÷50 °C
<b>Declarations</b>	CE

\* The given value of 30 W per port is the maximum value. The total power consumption should not exceed 30 W.


## 2. Installation

### 2.1. Requirements


The switch should be mounted by a qualified installer, holding relevant permits and licenses (applicable and required for a given country) for low-voltage installations. The device should be mounted in a place protected from weather conditions and direct sun, with temperatures from -25 °C to + 50 °C. Thanks to the use of the OZB2 mounting plate (optional accessory), it is possible to mount the device on a pole (not included).

The load balance should be done before installation Switcha. The given value of 30 W per port is the maximum value referring to a single output. The total power consumption should not exceed 30 W when all PoE ports are being used. The increased demand for power is particularly evident in the case of cameras with heaters or infrared illuminators - when launching these features, the power consumption increases rapidly, which may adversely affect the operation of the switch. The device is designed for a continuous operation and is not equipped with a power-switch. Therefore, an appropriate overload protection in the power supply circuit should be provided. The electrical system shall be made in accordance with applicable standards and regulations.

### 2.2. Installation procedure



1. **Before installation, cut off the voltage in the 230 V power-supply circuit.**
2. Mount the PSU in a selected location and connect the wires (tighten cable glands - unused should be plugged).
3. Connect the power cables (~230 V) to L-N clips of the PSU. Connect the ground wire to the terminal marked by the earth symbol . Use a three-core cable (with a yellow and green protection wire) to make the connection.



**The shock protection circuit shall be performed with a particular care, i.e. the yellow and green wire coat of the power cable shall stick to one side of the terminal - marked with  symbol on the PSU enclosure. Operation of the PSU without the properly made and fully operational shock protection circuit is UNACCEPTABLE! It can cause a device failure or an electric shock.**

4. Connect the camera wires to the RJ45 connectors (PoE connectors).
5. Connect the power 230 V.
6. Check the optical indication of the switch operation (see Table 4).
7. After installing and checking proper working, the enclosure can be closed.


Connection schemes.

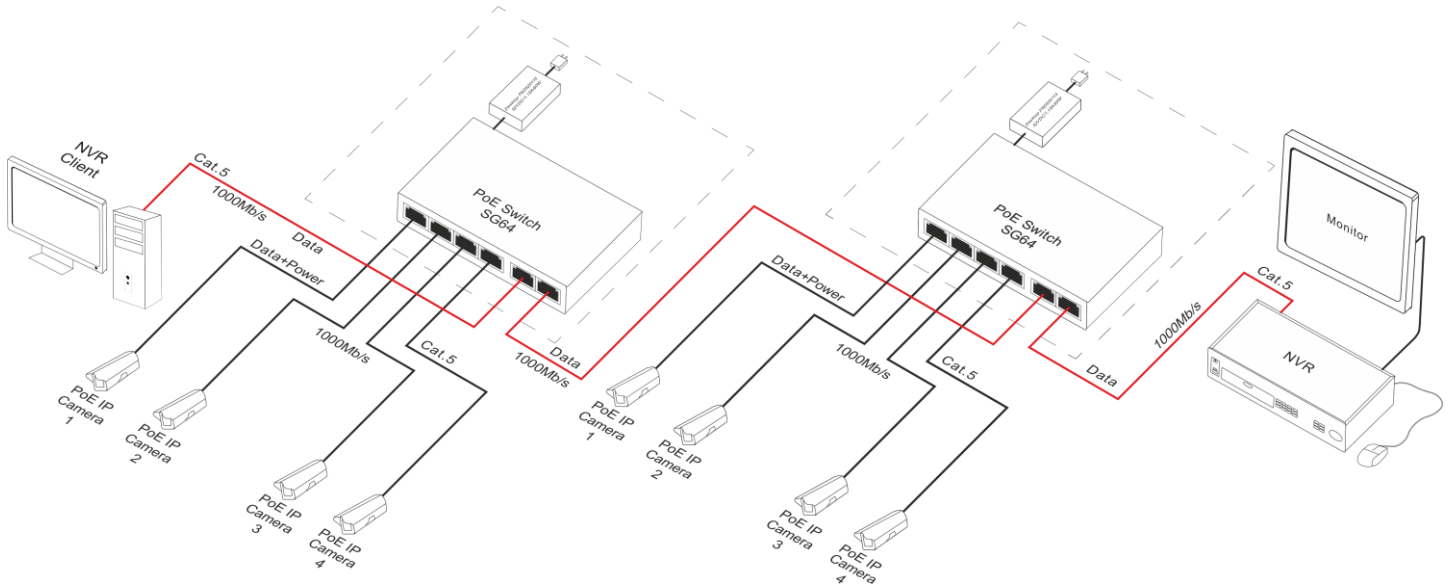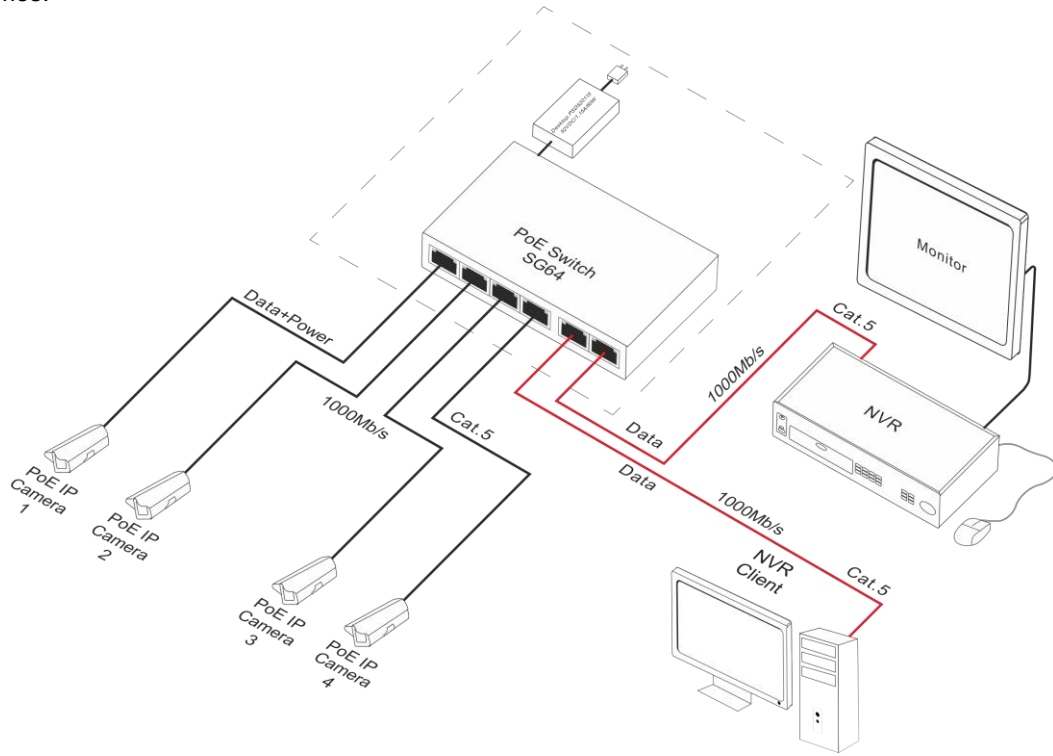









### 3. Operation indication.

Table 4. Operation indication









#### OPTICAL INDICATION OF THE SWITCH's POWER SUPPLY

<b>GREEN LED LIGHT (Power)</b> Indication of the switch's power supply	<b>PWR</b> 	<b>OFF</b> – no power supply of the switch <b>ON</b> – power supply on, normal operation
---	--	---

#### OPTICAL INDICATION AT THE PoE PORTS (1÷4)

<b>GREEN LED LIGHT (PoE)</b> Indication of the PoE power supply at the RJ45 ports	   	<b>OFF</b> - no power supply at the RJ45 port (the device is not connected or not compliant with the IEEE802.3af/at standard) <b>ON</b> – supply at the RJ45 port <b>Blinking</b> – short-circuit or output overload
<b>YELLOW LED LIGHT (LINK)</b> The connection status of LAN devices, 10/100/1000Mb/s and data transmission	   	<b>OFF</b> - no connection <b>ON</b> - the device is connected; 10/100/1000Mb/s <b>Blinking</b> – data transmission

#### OPTICAL INDICATION AT THE UP LINK PORTS

<b>GREEN LED LIGHT</b>	   	<b>OFF</b> - no connection/ the device is connected; 10/100Mb/s <b>ON</b> – the device is connected; 1000Mb/s
<b>YELLOW LED LIGHT (LINK)</b> The connection status of LAN devices, 10/100/1000Mb/s and data transmission	   	<b>OFF</b> - no data transmission <b>ON</b> - the device is connected; 10/100/1000Mb/s <b>Blinking</b> – data transmission



#### WEEE LABEL

**Waste electrical and electronic equipment must not be disposed of with normal household waste. According to the European Union WEEE Directive, waste electrical and electronic equipment should be disposed of separately from normal household waste.**

**Pulsar sp. j.**  
 Siedlec 150, 32-744 Łapczyca, Poland  
 Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50  
 e-mail: [biuro@pulsar.pl](mailto:biuro@pulsar.pl), [sales@pulsar.pl](mailto:sales@pulsar.pl)  
 http:// [www.pulsar.pl](http://www.pulsar.pl), [www.zasilacze.pl](http://www.zasilacze.pl)